

Solid State High Power Amplifier Systems

0.5-6GHz /50dB Gain/49 dBm Psat/220V AC

Model: TLPA0.5G6G-50-49-BC

TLPA0.5G6G-50-49-BC is a solid state high power amplifier systems provides high output power and high gain across the 0.5 to 6 GHz frequency range. The amplifier features a built-in 220V power supply, making it easy to use in most lab environments. This model features thermal self protection, preventing damage to the amplifier and providing added reliability.

Features:

- Wide Band: 0.5-6GHz
- Gain: 50dB Min
- Psat Output Power:49dBm Min
- Protection:Over TEM,over voltage, over current ,over VSWR protection
- 50 Ohm Matched Input / Output



Electrical Characteristics:

Parameter	Symbol	Min	Typ	Max	Units
Frequency range	BW	0.5-6			GHz
Gain	GP	50			dB
Gain flatness	ΔGL		± 3.5		dB
Gain adjust Range	ΔGR	20			dB
Gain adjust Step	ΔGS		0.5		dB
Output Psat	Psat	49			dBm
Spurious	Spur			-60	dBc
Harmonics	HAM		-10		dBc
Input VSWR	VSWR _{in}			2.0	:1
AC Voltage	Vac		220		V AC
Impedance	I/O-IMP	50			Ohms

Mechanical Specifications:


Parameter	Value	Units
Input /Output Connector	N Female/N Female	
AC Power Interface	Air switch	
Size	19 Inch 3U	mm
Weight	≤30	Kg

Absolute Maximum Ratings:

Parameter	Value
Supply Bias Voltage	260V AC
RF Input Power	+5 dBm
ESD sensitivity (HBm)	Class 0, passed 150V

Outline Drawing:

Unit:mm

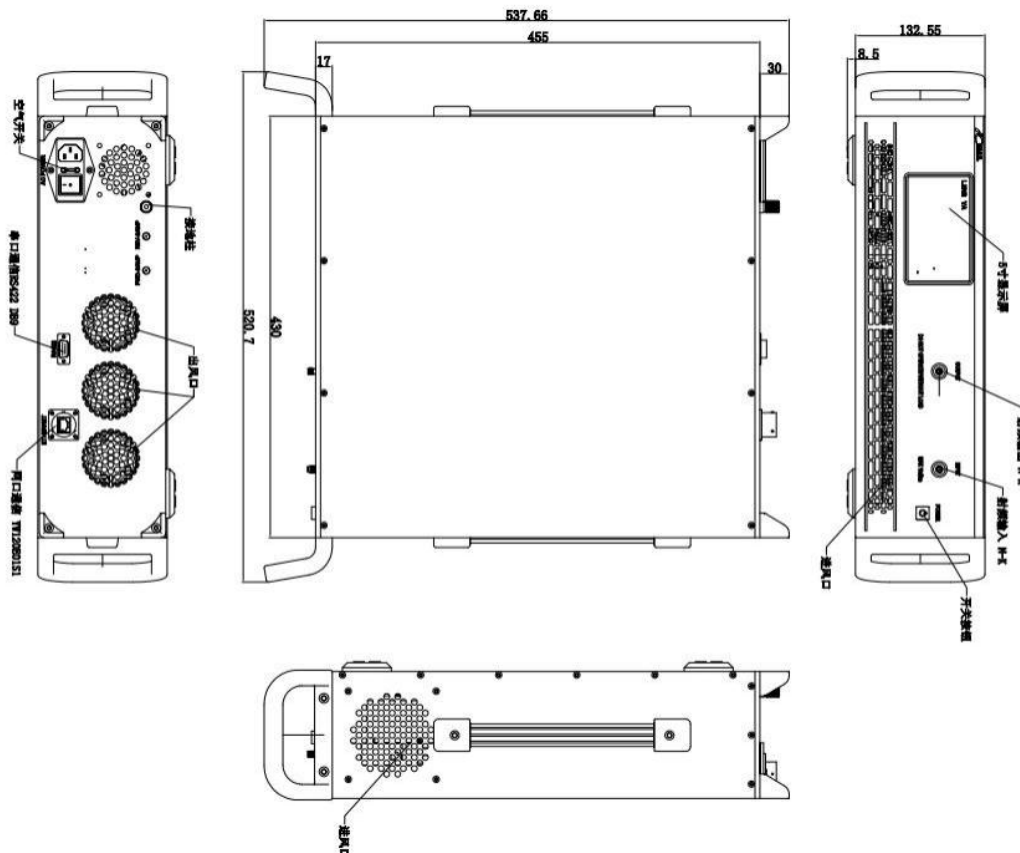

Key Features:

Parameter	Advantages
Remote Control	Ethernet /RS422
Monitoring functions	1,Forward Power 2,Temp Fault
Protection functions	1,Over TEM 2,Over voltage 3,Over current protection 4,Over VSWR
Control functions	1,Gain setting with 31.5dB range 2,ALC
Cooling system	Built in Cooling system,forced air cooling

Environmental Conditions:

Parameter	Min	Typ	Max	Units
Operating Temperature*	-20		+50	°C
Non-operating Temperature*	-30		+65	°C
Relative humidity		95		%
Altitude	10,000			feet
Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

*Note: For a wider temperature range, please consult the manufacturer.

Ordering Information:

Base Number	Description	Revision
TLPA0.5G6G-50-49-BC	Solid State High Power Amplifier Systems 0.5-6GHz,Gain:50dB,Psat:49 dBm,220V AC,Built in Fan Cooling	Rev.1.1