

Solid State High Power Amplifier Systems

6-18 GHz /43dB Gain/43 dBm Psat/220 V AC

Model: TLPA6G18G-43-43-BC

TLPA6G18G-43-43-BC is a solid state high power amplifier systems provides high output power and high gain across the 6 to 18 GHz frequency range. The amplifier features a built-in 220V power supply, making it easy to use in most lab environments. This model features thermal self protection, preventing damage to the amplifier and providing added reliability.

Features:

- Wide Band: 6-18GHz
- Gain: 43dB Min
- Psat Output Power:43dBm Min
- Protection:Over TEM,over voltage, over current ,over VSWR protection.
- 50 Ohm Matched Input / Output

Electrical Characteristics:

Parameter	Symbol	Min	Typ	Max	Units
Frequency range	BW	6-18			GHz
Gain	GP	43			dB
Gain flatness	ΔGL		± 4		dB
ALC Precision	ALC			± 0.5	dB
Output Psat	Psat	43			dBm
Spurious@Pout=43dBm	Spur			-60	dBc
Harmonics@Pout=43dBm	HAM		-15		dBc
Input VSWR	VSWRin			2.0	:1
AC Voltage	Vac	220			V AC
Power Consumption	Pdiss	400@Max			W
Impedance	I/O-IMP	50			Ohms

Mechanical Specifications:


Parameter	Value	Units
Input /Output Connector	SMA Female/SMA Female	
Network port Communication	DB-9	
Size	19 Inch 2U	
Weight	≤20	Kg

Absolute Maximum Ratings:

Parameter	Value
RF Input Power	5 dBm
ESD sensitivity (HBm)	Class 0, passed 150V

Outline Drawing:

Unit:mm

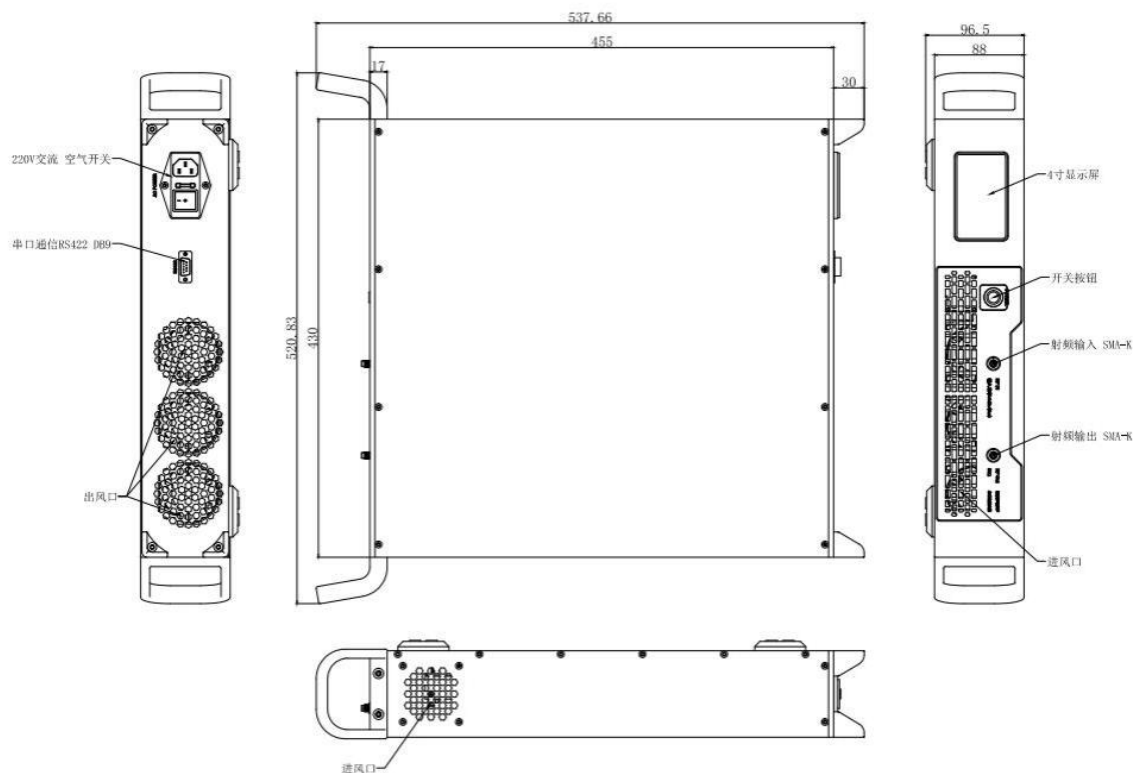

Key Features:

Parameter	Advantages
Control	RS422/Ethernet,LCD Screen Display
Display functions	1,Output Power 2,Reflect Power 3,Fault message
Protection functions	1,Over TEM 2,Over voltage 3,Over current protection 4,Over VSWR
Control functions	1,Power setting On/Off 2,ALC
Cooling system	Built in Cooling system,forced air cooling

Environmental Conditions:

Parameter	Min	Typ	Max	Units
Operating Temperature*	-20		+50	°C
Non-operating Temperature*	-45		+65	°C
Relative humidity		95		%
Altitude	10,000			feet
Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			


*Note: For a wider temperature range, please consult the manufacturer.

Ordering Information:


Base Number	Description	Revision
TLPA6G18G-43-43-BC	Solid State High Power Amplifier Systems 6-18GHz,Gain:43dB,Psat:43dBm,220V AC,Built in Fan Cooling	Rev.1.0

Typical Performance Data:


Gain vs Frequency

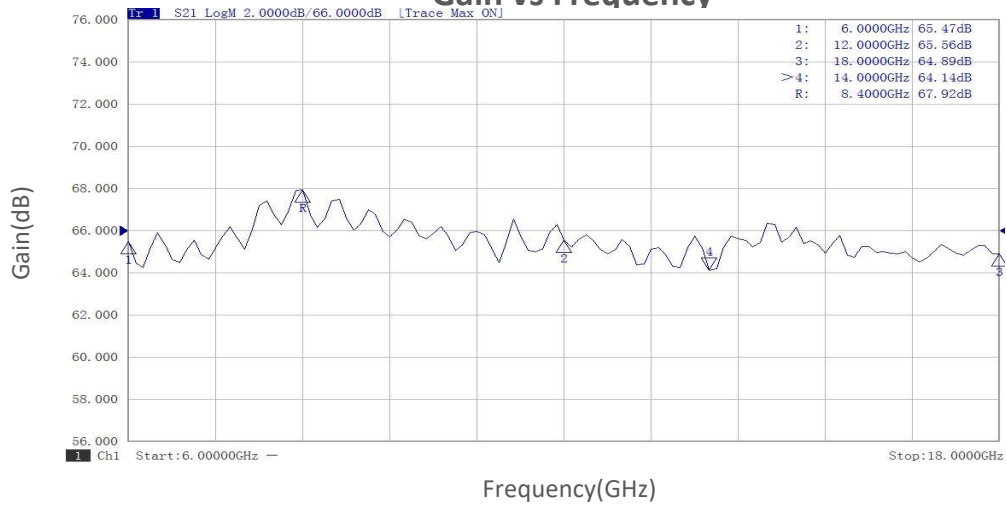

Input VSWR vs Frequency

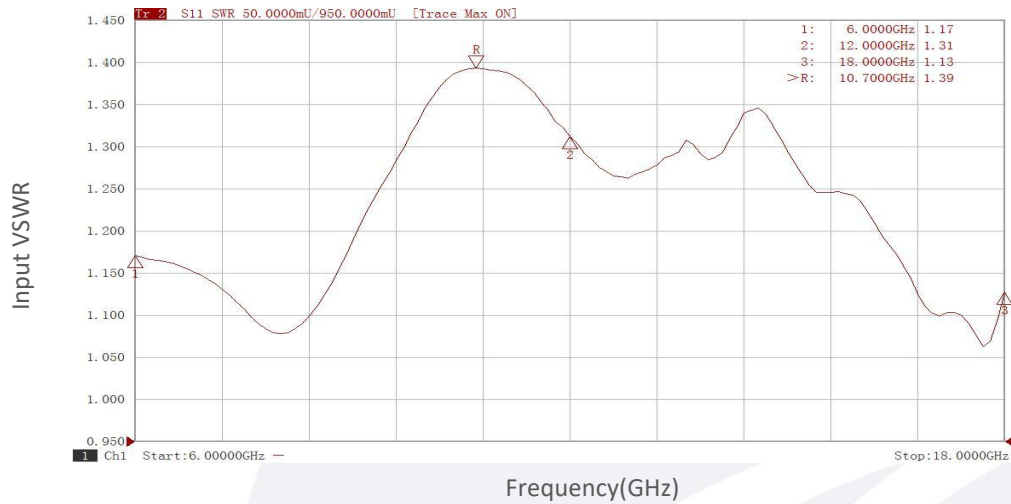


P1dB&P3dB vs Frequency

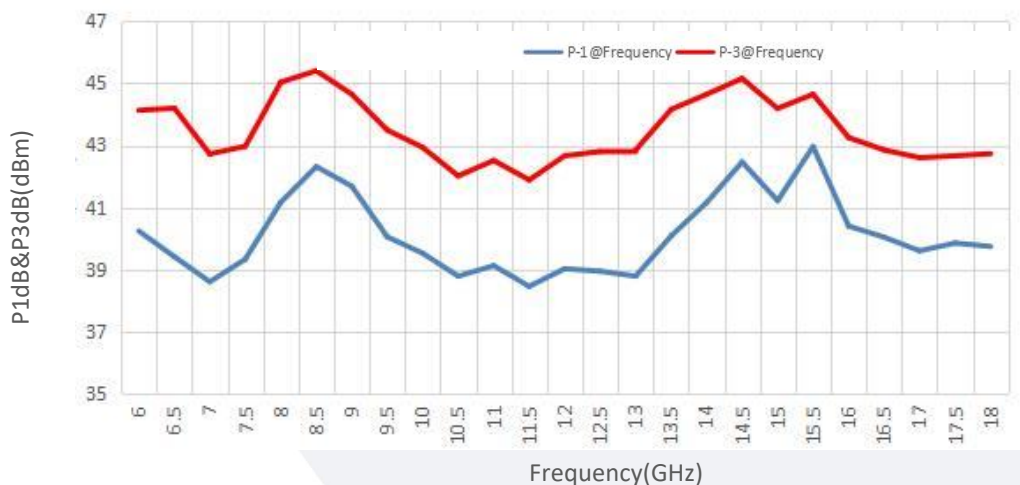


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

Typical Performance Data:


Pout@Pin

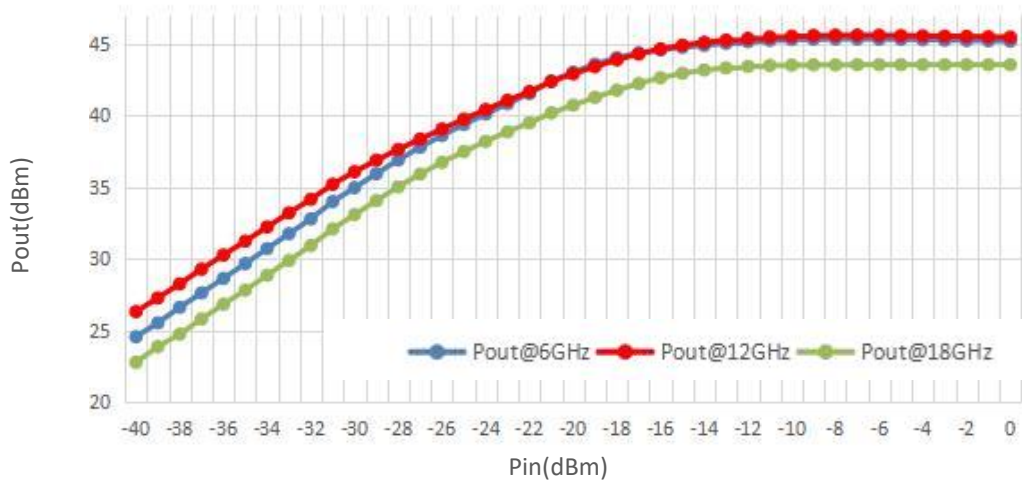

Pout@Equal_Pin

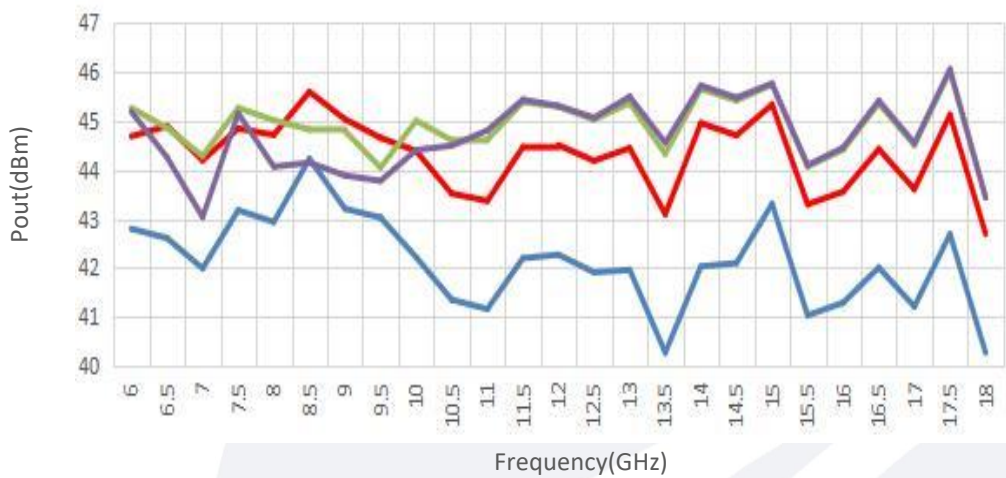


Harmonics vs Frequency

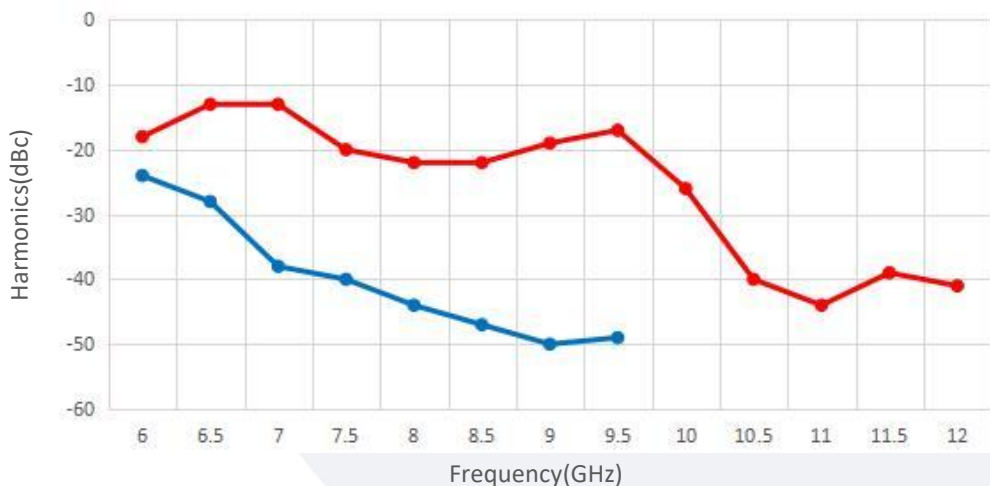

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

Typical Performance Data:

Spurious vs Frequency

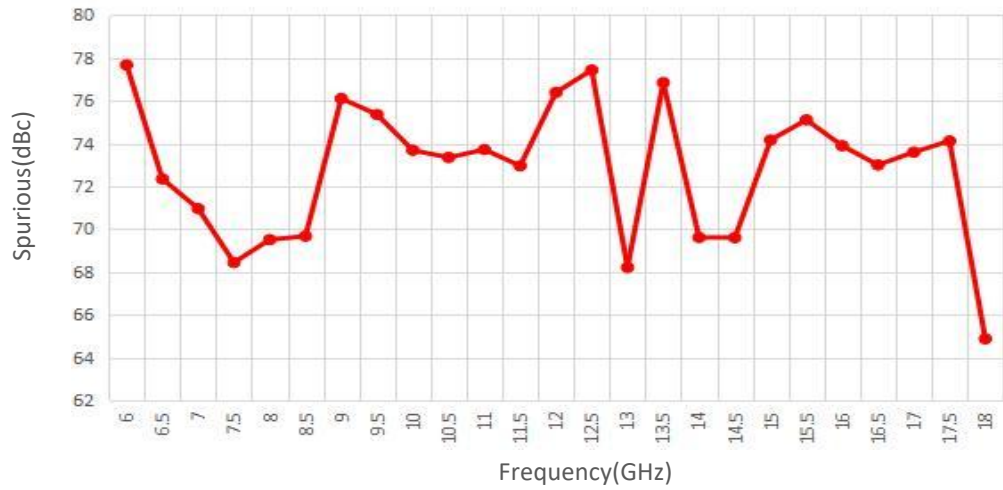

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.