

Solid State High Power Amplifier Systems

8-12GHz /64dB Gain/64dBm Psat/220V AC

Model: TLPA8G12G-64-64-P-BC

TLPA8G12G-64-64-P-BC is a solid state high power amplifier systems provides high output power and high gain across the 8 to 12 GHz frequency range. The amplifier features a built-in 220V power supply, making it easy to use in most lab environments. This model features thermal self protection, preventing damage to the amplifier and providing added reliability.

Features:

- Wide Band: 8-12 GHz
- Gain: 64dB Min
- Psat Output Power:64dBm Min
- Protection:Over TEM,over voltage, over current ,over VSWR protection
- 50 Ohm Matched Input / Output


Electrical Characteristics:

Parameter	Symbol	Min	Typ	Max	Units
Frequency range	BW	8-12			GHz
Gain	GP	64			dB
Gain flatness	ΔGL		±4.5		dB
Output Psat	Psat	64	65		dBm
Output P1dB	P1dB		/		dB
Spurious	Spur			-60	dBc
Harmonics	HAM		-30		dBc
Input VSWR	VSWRin			2.0	:1
AC Voltage	Vac	220			V AC
Power Consumption@5%@10%@20%	Pdiss	900/1700/3500			Watts
Impedance	I/O-IMP	50			Ohms

Parameter	Value	Units
Input /Output Connector	SMA Female/WRD750	
Forward/Reverse Coupling	SMA Female/SMA Female	
Front Panel LCD Screen Display	7 inch LCD Screen Display	
Size	19 Inch 5U	
Weight	45	Kg

Parameter	Value
RF Input Power	5 dBm
ESD sensitivity (HBm)	Class 0, passed 150V

Unit:mm

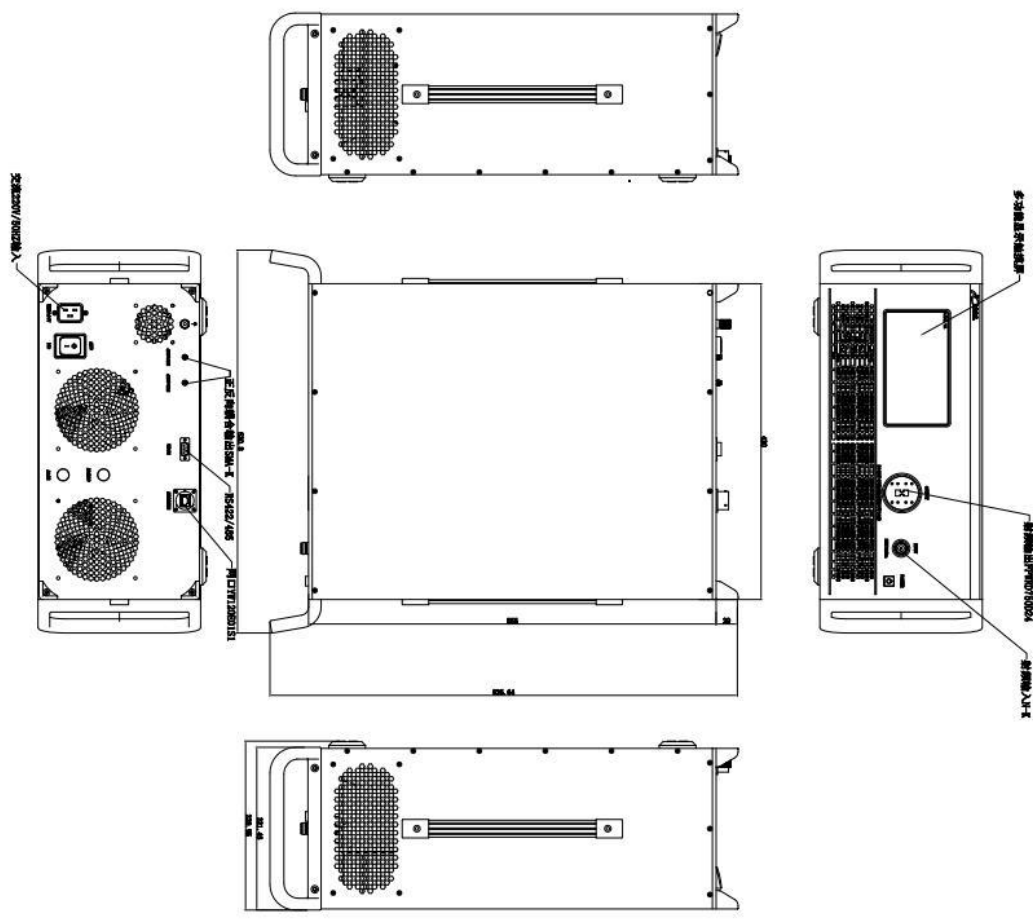

Key Features:

Parameter	Advantages
functions	1, Power setting On/Off 2, ALC automatic level control
Protection functions	1, Over TEM 2, Over voltage 3, Over current protection 4, Over VSWR
Cooling system	Built in Cooling system, forced air cooling

Environmental Conditions:

Parameter	Min	Typ	Max	Units
Operating Temperature*	-20		+40	°C
Non-operating Temperature*	-45		+65	°C
Relative humidity		95		%
Altitude	10,000			feet
Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
Shock(non operating)	20G for 11msc half sin wave, 3 axis both directions			

*Note: For a wider temperature range, please consult the manufacturer.

Ordering Information:

Base Number	Description	Revision
TLPA8G18G-64-64-P-BC	Solid State High Power Amplifier Systems 8-18GHz, Gain: 64dB, Psat: 64 dBm, 220V AC, Built in Fan Cooling	Rev.1.0