

Solid State High Power Amplifier Systems

26.5-40GHz /57dB Gain/57 dBm Psat/380V AC

Model: TLPA26.5G40G-57-57-BC

TLPA26.5G40G-57-57-BC is a solid state high power amplifier systems provides high output power and high gain across the 26.5 to 40 GHz frequency range. The amplifier features a built-in 380V power supply, making it easy to use in most lab environments. This model features thermal self protection, preventing damage to the amplifier and providing added reliability.

Features:

- Wide Band: 26.5-40GHz
- Gain: 57dB Min
- Psat Output Power:57dBm Min
- Protection:Over TEM,over voltage, over current ,over VSWR protection
- 50 Ohm Matched Input / Output

Electrical Characteristics:

Parameter	Symbol	Min	Typ	Max	Units
Frequency range	BW	26.5-40			GHz
Power Gain	GP	57			dB
Gain flatness	Δ GL		± 5		dB
Output Psat	Psat	57			dBm
Spurious	Spur			-60	dBc
Harmonics	HAM			-20	dBc
Input VSWR	VSWRin			2	:1
AC Voltage	Vac		380		V AC
Power Consumption	Pdiss	12500@Max			W
Impedance	I/O-IMP	50			Ohms

Mechanical Specifications:


Parameter	Value	Units
Input /Output Connector	2.92 Female/WR-28	
Forward/Reverse Coupling	2.92mm Female/ 2.92mm Female	
Communication Connector	RJ45/DB9	
Front Panel LCD Screen Display	7 inch LCD Screen Display	
Size	20U	
Weight	250	Kg

Absolute Maximum Ratings:

Parameter	Value
RF Input Power	0 dBm
ESD sensitivity (HBM)	Class 0, passed 150V

Outline Drawing:

Unit:mm

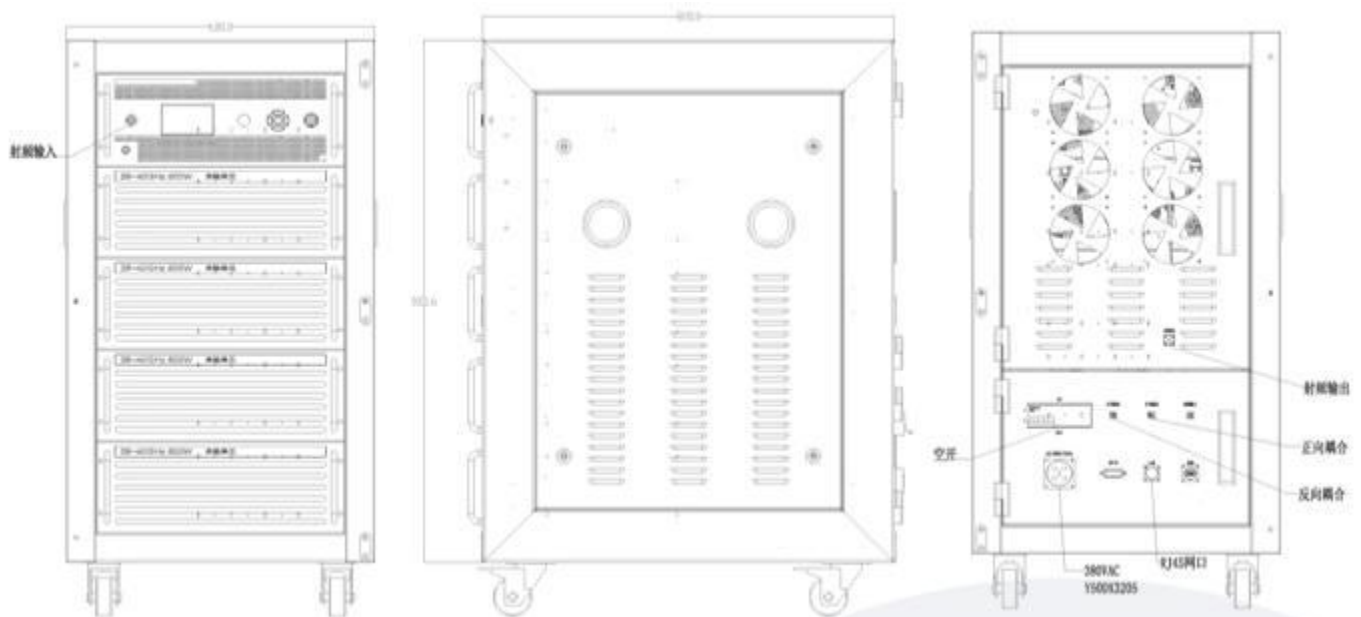

Key Features:

Parameter	Advantages
Control	RS422/LAN, LCD Screen Display
Protection functions	1,Over TEM 2,Over voltage 3,Over current 4,Over VSWR
Control functions	1,Power setting On/Off 2,ALC
Cooling system	Front to back forced air cooling fans makes this ideal for usage in test equipment racks

Environmental Conditions:

Parameter	Min	Typ	Max	Units
Operating Temperature*	-20		+50	°C
Non-operating Temperature*	-40		+65	°C
Relative humidity		95		%
Altitude	10,000			feet
Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			


*Note: For a wider temperature range, please consult the manufacturer.

Ordering Information:


Base Number	Description	Revision
TLPA26.5G40G-57-57-BC	Solid State High Power Amplifier Systems 26.5-40GHz,Gain:57dB,Psat:57dBm,380V AC,Built in Fan Cooling	Rev.1.1

Typical Performance Data:


Gain vs Frequency

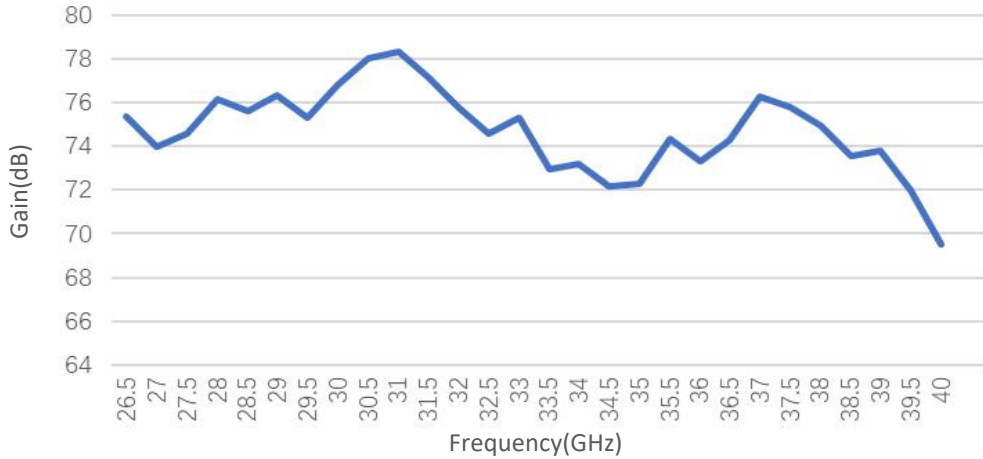

Input VSWR vs Frequency

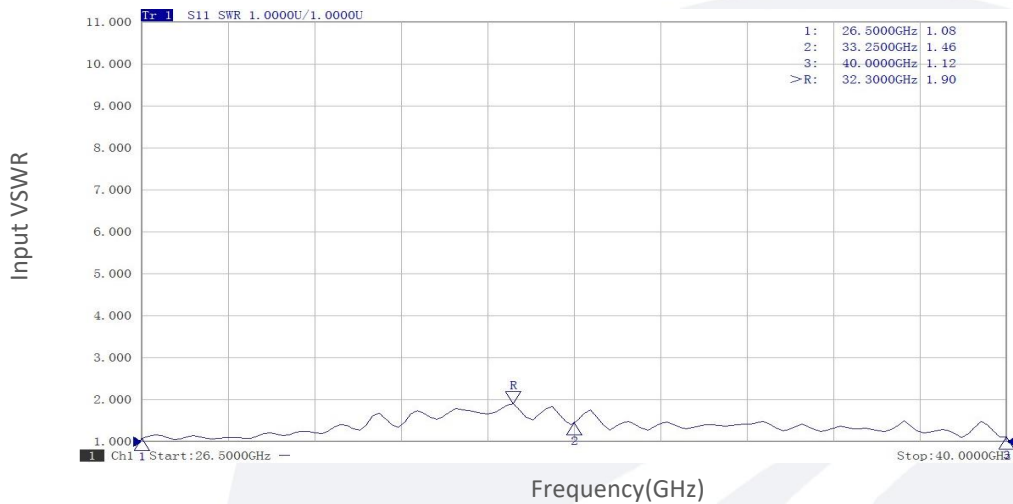


Pout@Equal_Pin

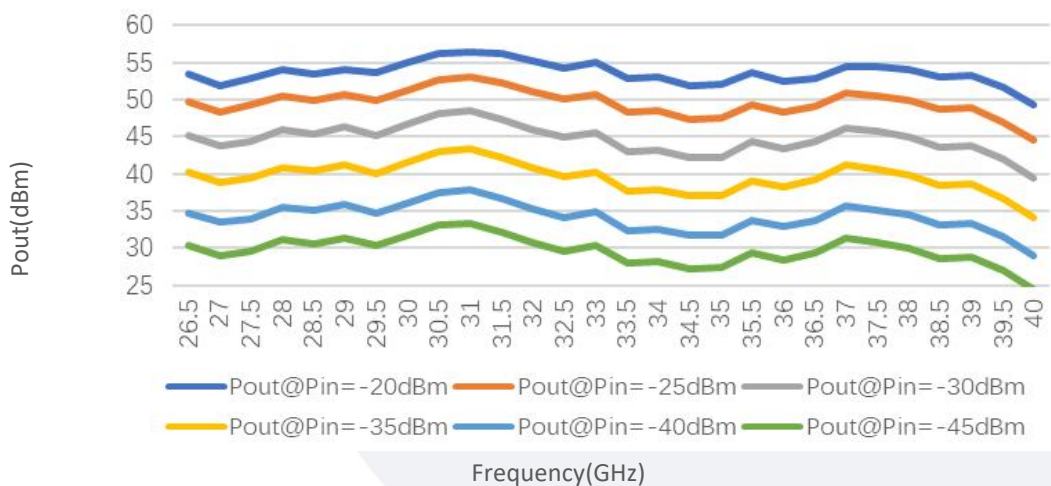


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

Typical Performance Data:

P1dB vs Frequency

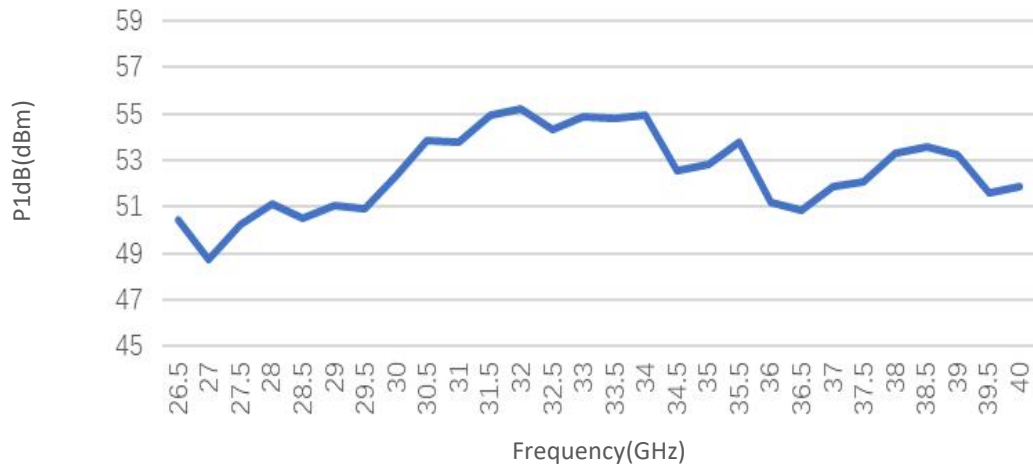

Spurious vs Frequency

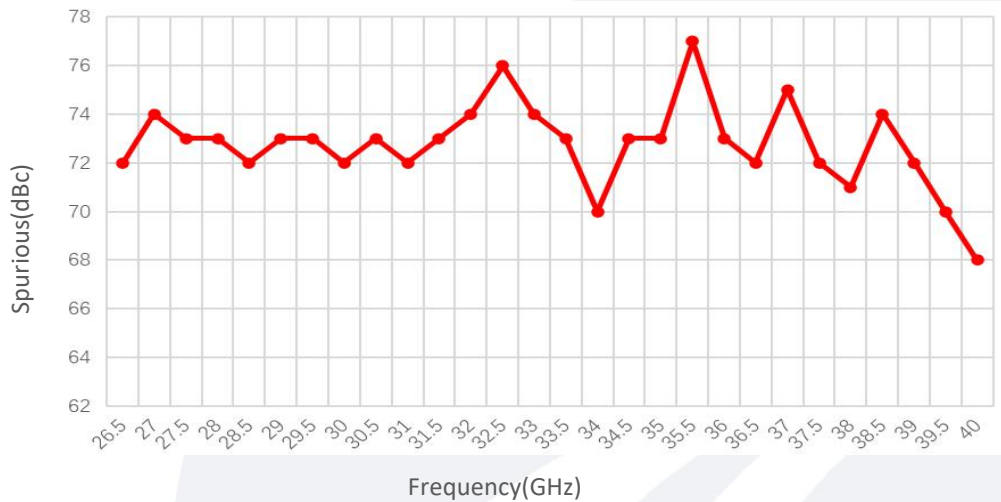

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.