

Part No : TLLF-DC-10KHz-S

DC-10KHz Low Pass Filter

Electrical Specifications:


Parameter		Min	Typ	Max	Units
Frequency range		DC-10			KHz
Insertion Loss				3	dB
Rejection	@20-1000KHz	40			dB
Power Handling			1		W
Input VSWR				1.8	:1
Output VSWR				1.8	:1
Impedance		50			Ohms

Mechanical Specifications:

Operation Temperature: -40°C - +70°C
 Stroage Temperature: -55°C - +85°C
 Material: Silver Plating
 Connectors: SMA Female
 Size: 60*20*20(±0.1mm)

Outline Drawing:

Unit: mm

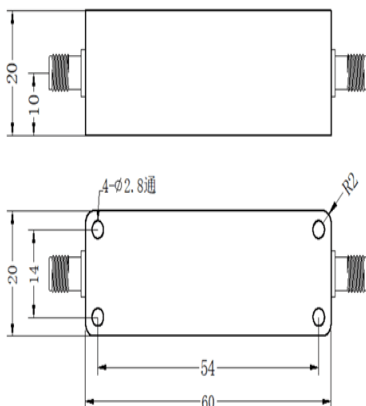

Ordering Information:

Part Number	Description
TLLF-DC-10KHz-S	DC-10KHz, Insertion Loss: 3dB, SMA FeMale Coaxial Fixed Termination