

Part No: TAXXA2-2.4-50


2.4mm Attenuators • DC – 50GHz - 2 W

ELECTRICAL

- **Frequency Range** DC – 50GHz
- **Attenuation (dB)**
 - 1-3 -0.6/+0.9dB
 - 4-8..... -0.7/+1.0dB
 - 9-25 -0.8/+0.8 dB
 - 26-40 -0.9/+1.0 dB
- **VSWR (MAX)** DC – 50GHz..... 1.3: 1
- **Impedance** 50 Ohms
- **RF Power Rating** 2Watts Average at 25°C
PEAK: 100 Watts (5 μSec PulseWidth ,1% Duty Cycle)

MECHANICAL

- **Temperature Range** -55°C - +125°C
- **Connectors** Passivated Stainless Steel /Brass, Ternary Alloy Plated
- **Connector Pins** Beryllium Copper, Gold Plated
- **Body** Passivated Stainless Steel
- **Insulators** PEI

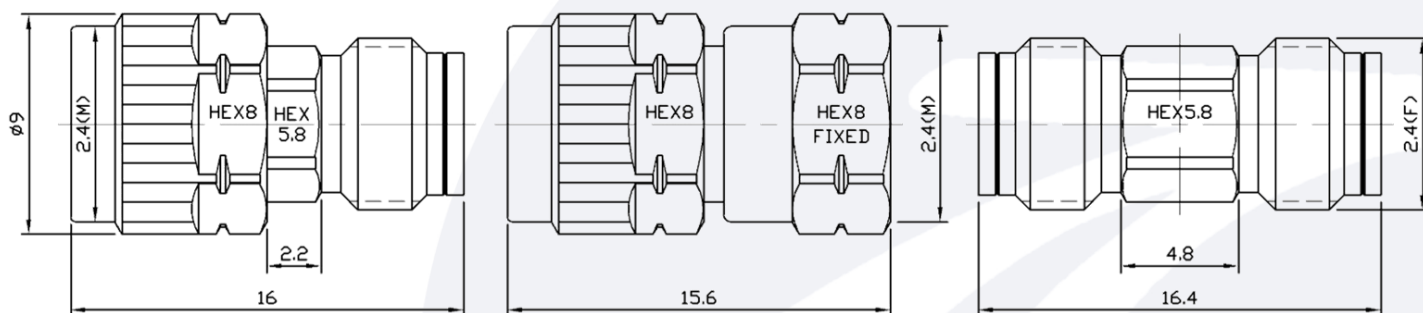

Unit: mm

ORDER

Order Number: TAXXA2-2.4-50

dB