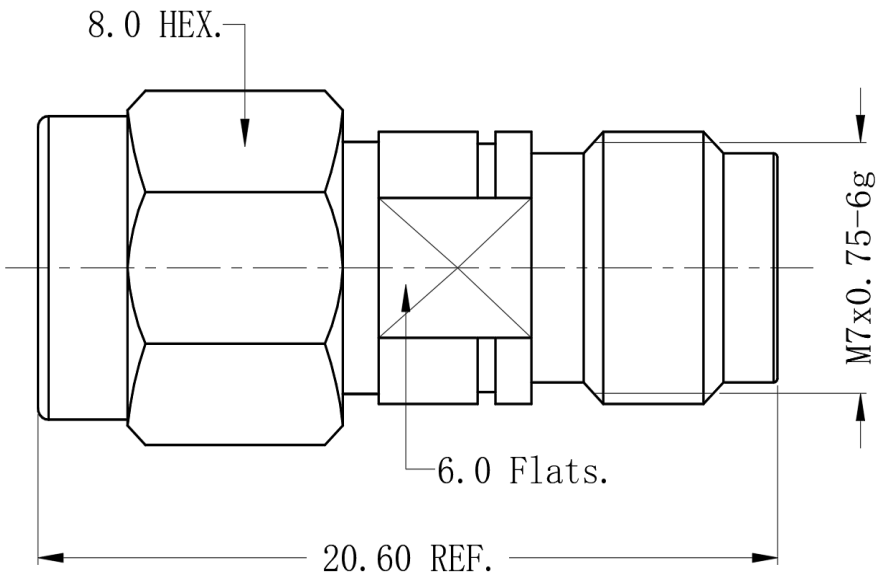

Electrical & Environmental Characteristics	
Impedance	50 Ohm
Insulation Resistance	5000 MΩ
Operating Frequency	DC~40GHz
Dielectric Withstanding Voltage	1000V
VSWR	1.25 Max
Insertion Loss	≤0.30dB
Operating Temperature	- 55~+165℃
Material & Coat-Plating	
Inner Conductor	BE-CU, Gold Plated
Dielectric	PEI
Body&Nut	Stainless Steel, Passivated

THIS DRAWING IS A CONTROLLED DOCUMENT		DWN	Suzhou Talent Microwave,Inc
		CHK	
Unit mm	TOLERANCES UNLESS OTHERWISE SPECIFIED 0 PLC ±0.25 1 PLC ±0.15 2 PLC ±0.12 3 PLC ±- 3 PLC ±- ANGLES ±1°	APVD	Product Model 2.92/2.4-JK 2.92mm Male to 2.4mm Female adaptor
		PRODUCT SPEC	
		APPLICATION SPEC	
MATEIAL SEE TABLE	FINISH SEE TABLE	WEIGHT	SIZE A4 / GAGE CODE 0T8L4 / DRAWING NO
		CUSTOMER DRAWING	SHEET1 OF 1 / RVE 1